


OPTION 1

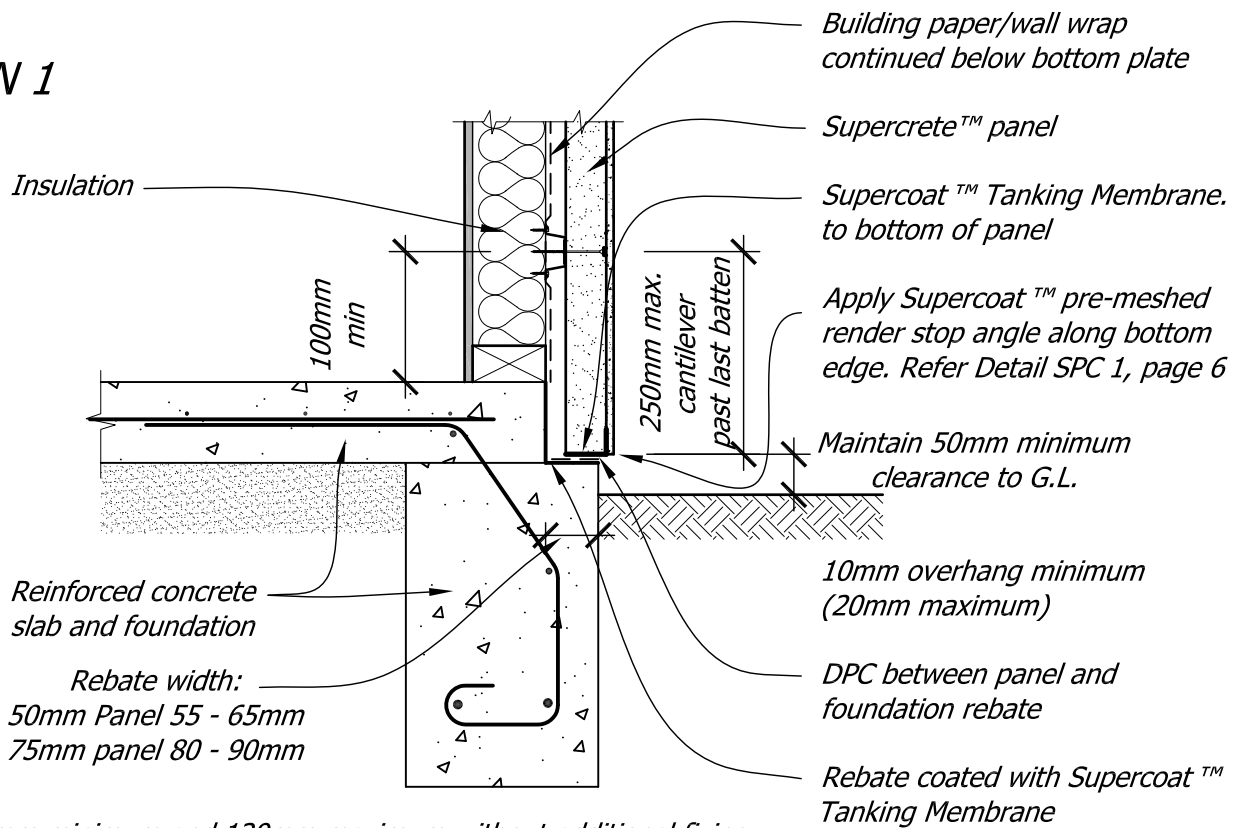

NOTE:

Rebate depth is 50mm minimum and 120mm maximum without additional fixing


For 50mm Panel:

Rebate width is 65mm maximum, 55mm minimum. Panel must have a 10mm drip edge minimum and 20mm maximum.

For 75mm Panel:

Rebate width is 90mm maximum, 80mm minimum. Panel must have a 10mm drip edge minimum and 20mm maximum.

OPTION 2

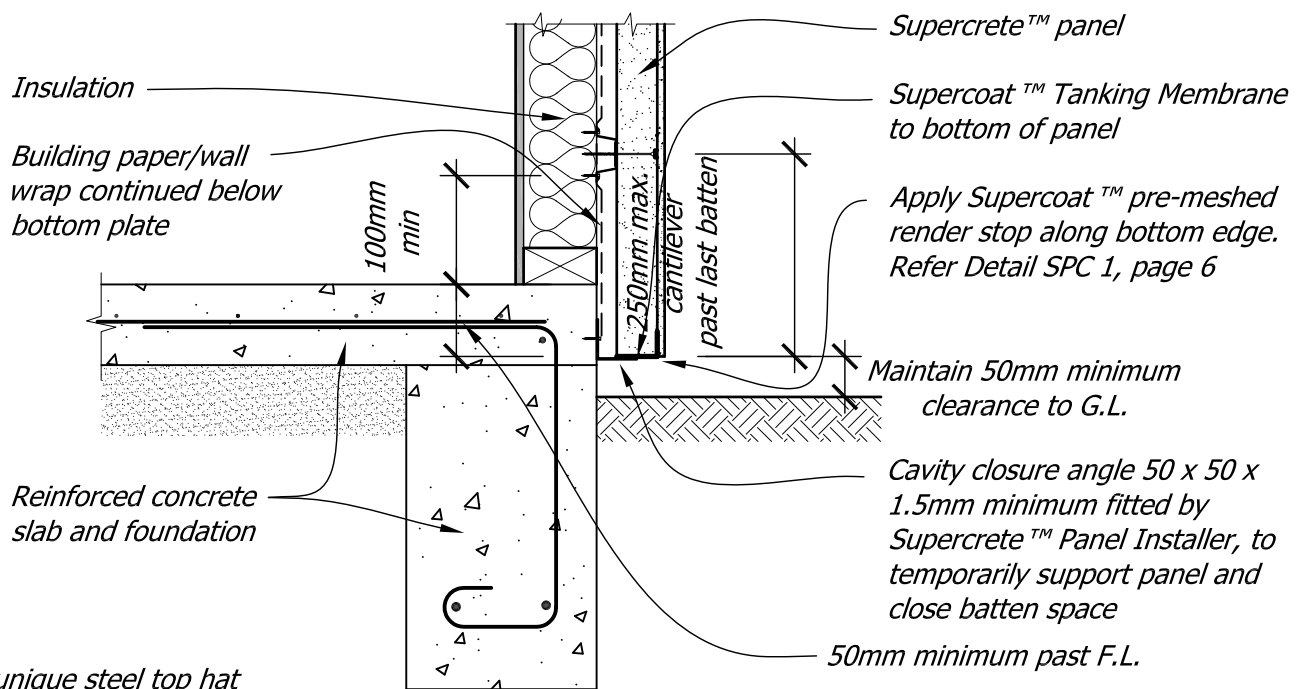

Steelock™ a unique steel top hat batten mounting system.

Thermoseal™ a unique thermally efficient closed cavity cladding system.

Copyright © Superbuild International Ltd 2013

Supercrete™

Title:

Typical Supercrete™ Panel Foundation Detail

**PANEL CLADDING
CONSTRUCTION**

Date: February 2014

Scale:

Detail No. SPC 2-1

This drawing must be read in conjunction with the Supercrete Panel Cladding System Design & Installation Guide